


Rental power unit 15 kW SA 1922



- 15 kW
- Maximum flow rate
55 l/min
- Maximum pressure
210 bar

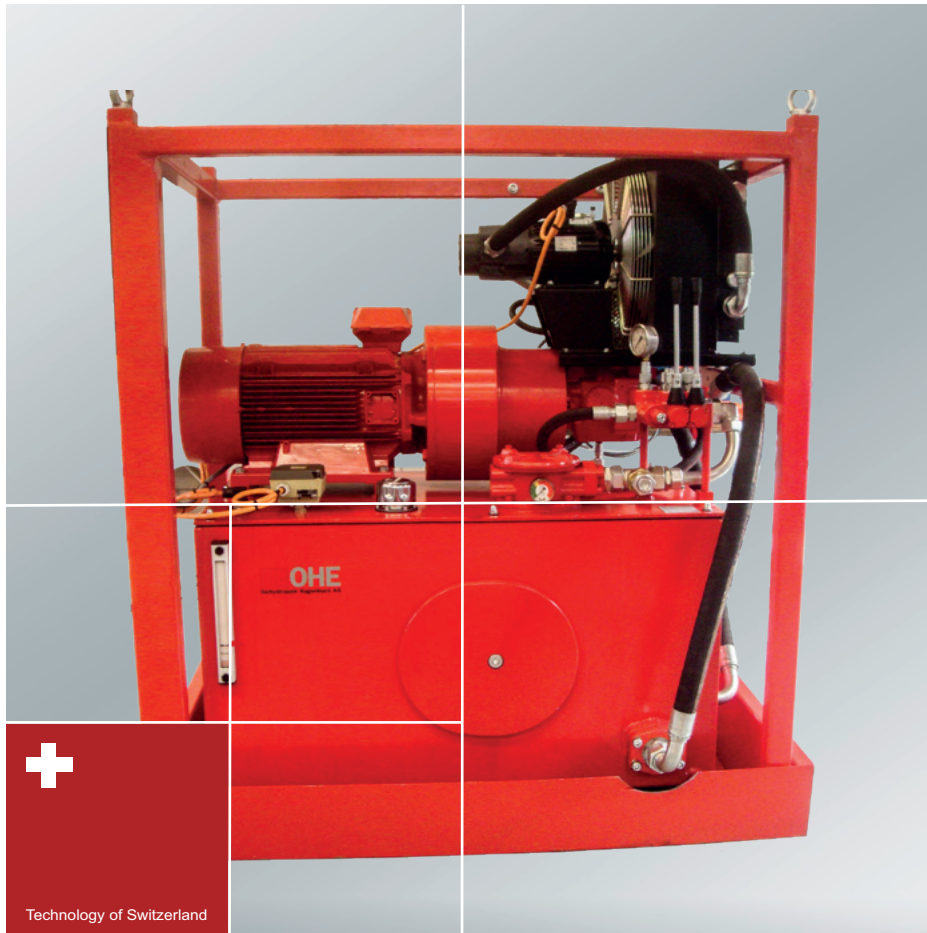

Technical Data

Max. flow rate	55 l/min
Max. pressure	210 bar
Pump pressure control	Adjustable using adjusting screw
Pump flow rates	Adjustable using adjusting screw
Return filter	3 Micron
Filter and cool-circle	40 l/min, air cooler
Cooling output	About 6 kW (at 25° room temperature or 0.26 kW/°C)
Oil-temperature control	Cooler starts/stops automatically
Oil tank	300 litre
Additional tank connections	2 connections in different sizes
Fill level monitor	Automatically shuts off if level drops too low
Dimensions in mm (l x w x h)	1400 x 900 x 1600
Weight	475 kg (without oil)

Electrical connections

1 x CEE-plug 32 A (400VAC / 50Hz), with cable l= 6m

Hydraulic connections

Pressure connections A	2 x Ermeto 16 S (or R1/2")
Pressure connections B	2 x Ermeto 16 S (or R1/2")
Return connection	Ermeto 35 L (28 L), on return filter
Tank connection	1 x R 1/2"
Tank connection	1 x R 3/8"

Special

- Axial piston pump with adjustment screw for adjusting the maximum pressure and for adjusting and/or limiting the piston displacement
- Separate temperature-controlled filter-cooling circuit
- Fill level monitor with automatic cut-off
- Emergency stop-button on aggregate
- Pump can be activated and de-activated with buttons
- Valve block with 2x 4/3-direction manually controlled valves, locking
- Additional pressure relief valve on the valve block

Accessories / parts subject to wear

Replacement filter cartridge	1 piece (Schroeder)
Filling and air vents	1 piece (Art.-No. 62.1073.6140)

202501/V03/E