


Rental power unit Diesel SA 2102

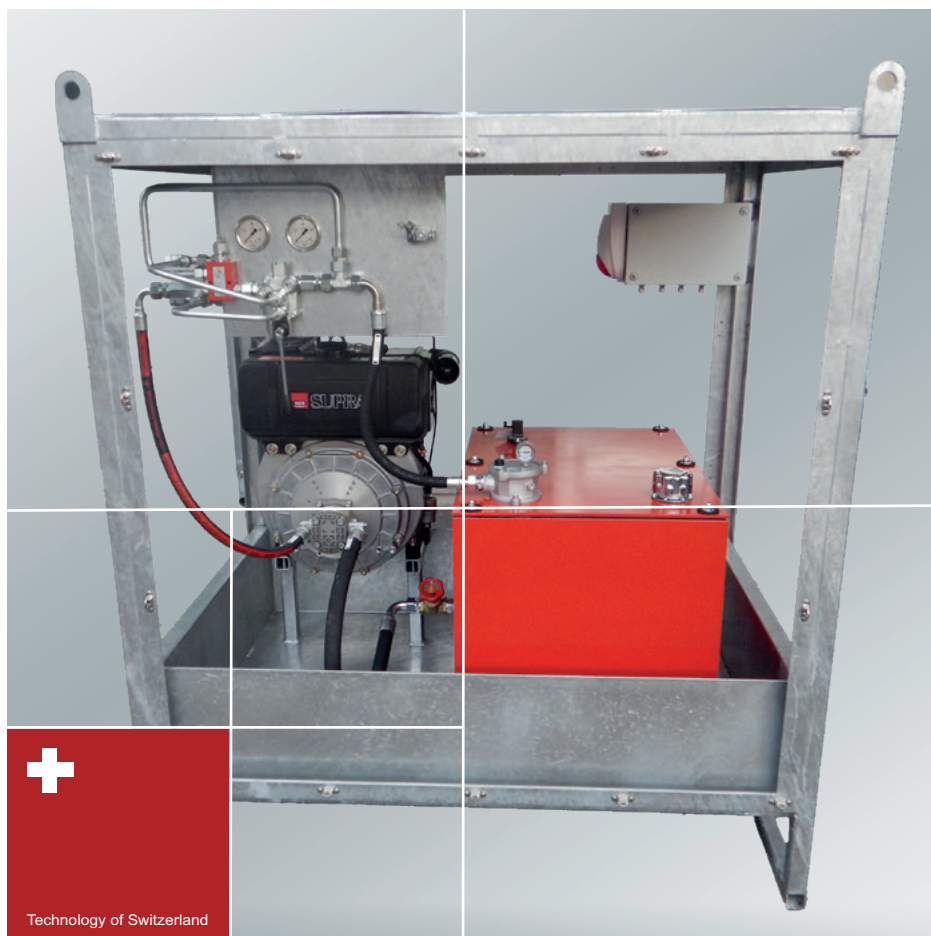

- **8.4 kW**
- **Maximum flow rate
14 l/min**
- **Maximum pressure 200 bar**
- **No power supply required
(autonomous)**
- **Operation in the shell/
gallery area allowed**

Technical data

Max. flow rate	14 l/min
Max. pressure	200 bar
Return flow filter	10 microns
Oil tank	200 litres
Dimensions in mm (L x w x h)	1380 x 990 x 1543
Weight	210 kg
Diesel tank	ca. 5 litres

Hydraulic connections

Pressure port side A	screw pipe connection 12 S
Pressure port side B	screw pipe connection 12 S

Special features

- Equipped with „crane straps“ for lifting the unit or moving with pallet lifting truck/forklift truck
- Adjustable operating pressure from 50 - 200 bar
- Valve operated by manual lever; switch positions will lock in place
- Optical clogging indication at the filter
- Electric tank level monitoring with alarm
- Manometer for pressure control on A and B side
- Suitable for construction sites - also outdoors

Accessories / wear parts

Replacement filter cartridges	1 unit (item no. FF.9003.00302)
-------------------------------	---------------------------------

202501/V03/D